




Quality. Performance. Value.

PERC MONO CRYSTALLINE MODULE -----HALF CELLS

DM385M6-60HBW

370 / 375 / 380 / 385

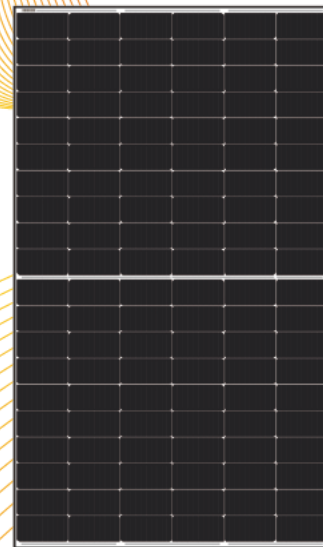

Technology

High module conversion efficiency through superior manufacturing technology



Half-Cut Design

Avoid the hot spot effect
Reduce power degradation



PID Free

Excellent PID resistance according to IEC TS 62804-1



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value

www.dmegc.solar

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output




- Our IP68 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 12 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 84.8% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly



Electrical Specifications

*STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	DM370M6-60HBW DM370M6-60HBW-V		DM375M6-60HBW DM375M6-60HBW-V		DM380M6-60HBW DM380M6-60HBW-V		DM385M6-60HBW DM385M6-60HBW-V	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Pm(W)	370	274.8	375	278.6	380	282.2	385	286.0
Imp(A)	10.91	8.88	11.01	8.96	11.11	9.04	11.21	9.12
Vmp(V)	33.95	30.95	34.10	31.09	34.24	31.22	34.38	31.34
Isc(A)	11.32	9.12	11.43	9.21	11.52	9.28	11.61	9.36
Voc(V)	41.72	39.06	41.89	39.22	42.06	39.38	42.23	39.53
Module Efficiency(STC)	20.31%		20.59%		20.86%		21.13%	
Power tolerance:0~+3%	*NMOT irradiance of 800W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1m/s							

Mechanical Data

Cell Type	DMPD9B166-223(1/2)
Cell Arrangement	120(6x20)
Module Structure	Glass/EVA/Backsheet(white)
Glass Thickness	3.2mm
PV module classification	Class II
Junction Box Rating	IP67/IP68
Cables	4mm ² /1100mm or Customized Length
Connector Type	MC4/MC4 Compatible
Fire Rating Class	C

Maximum Ratings




Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Maximum System Voltage	1000V/1500V DC(IEC)
Maximum Series Fuse Rating	20A
Number of Diodes	3

Packaging

Module Dimensions	1755x1038x35mm
Weight	21.0kg
Pallet Dimensions	1805x1130x1175mm
Container	40' HQ
Pieces per Pallet	31
Pallets per Container	26
Pieces per Container	806
Gross Weight per Pallet	700kg
Gross Weight per Container	16800kg

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42°C±3°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.270%/°C
Temperature Coefficient of Pmax	-0.365%/°C

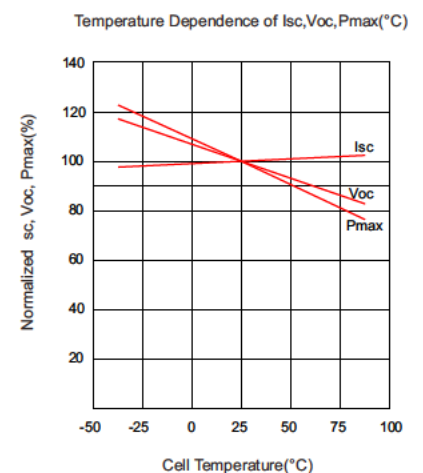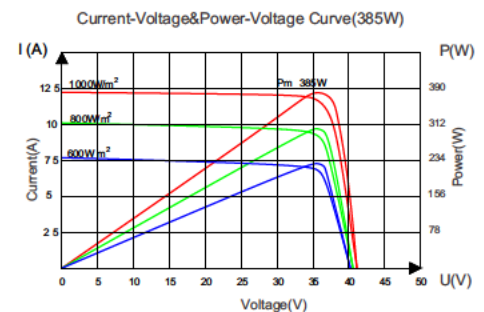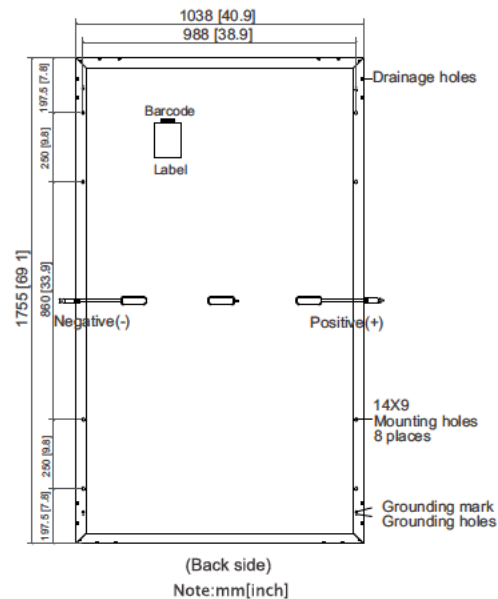

Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegc.solar